
INTERSTATE® BRICK

Face Brick Dimensions, Weights, Coverage and Packaging

	Depth (D)		Height (H)		Length (L)		Weights		Units /Area		Packaging	
Name	in	mm	in	mm	in	mm	lbs	kg	Units /ft²	Units /m²	Type	QTY
Modular 4 x 2 1/4 x 8	3 ⅝	92	2 ¼	57	7 ⅝	194	3.6	1.7	6.86	73.8	Cube	500
Modular Solid 4 x 2 1/4 x 8	3 ⅝	92	2 ¼	57	7 ⅝	194	4.8	2.1	6.86	73.8	Cube	500
2 3/4" Modular 4 x 2 3/4 x 8	3 ⅝	92	2 ¾	70	7 ⅝	194	3.0	1.4	5.80	60.3	Cube	420
King 3 x 3 x 10	3	76	2 ⅝	67	9 ⅝	244	4.5	2.04	4.80	51.7	Cube	424
4" Modular 4 x 4 x 8	3 ⅝	92	3 ⅝	90	7 ⅝	194	5.2	2.3	4.50	48.4	Cube	305
8" Modular 4 x 8 x 8	3 ⅝	92	7 ⅝	192	7 ⅝	194	11.1	5.03	2.25	24.2	Pallet	128
Norman 4 x 2 1/4 x 12	3 ⅝	92	2 ¼	57	11 ⅝	295	5.2	2.3	4.60	49.8	Cube	300
Utility 4 x 4 x 12	3 ⅝	92	3 ⅝	90	11 ⅝	295	8.0	3.62	3.00	32.3	Cube	183
2 1/4" Emperor® 4 x 2 1/4 x 16	3 ⅝	92	2 ¼	57	15 ⅝	397	6.7	3.03	3.43	36.5	Pallet	234
4" Emperor® 4 x 4 x 16	3 ⅝	92	3 ⅝	90	15 ⅝	397	10.6	4.8	2.25	24.2	Pallet	160
8" Emperor® 4 x 8 x 16	3 ⅝	92	7 ⅝	192	15 ⅝	397	22.5	10.2	1.13	12.1	Pallet	64

Weights shown are approximate dry weights. Weight will vary with moisture content and with color. Coring configuration varies depending on brick size. Please refer to individual brick sizes on the website for accurate configurations.

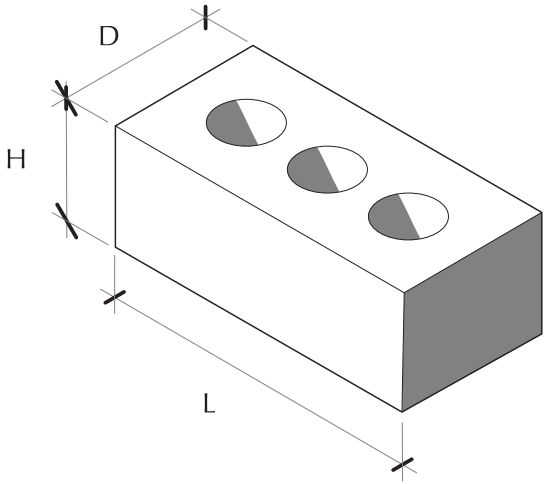

The Above Brick Manufactured by Interstate® Brick comply with the following specifications:

ASTM C216: Grade SW; Type FBS, FBX or FBA as specified in Purchase Order
CSA A82: Cored brick; Grade EG; Type S, X, or A as specified in the Purchase Order

Revision-1126