INTERSTATE® BRICK


Atlas® Brick Dimensions, Weights, Coverage and Packaging

	Depth (D)		Height (H)		Length (L)		Weights		Units /Area		Packaging	
Name	in	mm	in	mm	in	mm	lbs	kg	Units /ft²	Units /m²	Type	QTY
Atlas® Utility 4 x 4 x 12	3 5/8	92	3 5/8	92	11 5/8	295	8.2	3.7	3.00	32.3	Cube	207
Atlas® Emperor® 4 x 4 x 16	3 5/8	92	3 5/8	92	15 5/8	397	11.0	5.0	2.25	24.2	Pallet	160
Atlas® Super Emperor® 4 x 8 x 16	3 5/8	92	7 5/8	194	15 5/8	397	22.5	10.2	1.13	12.1	Pallet	64
Atlas® 6 x 4 x 12	5 5/8	143	3 5/8	92	11 5/8	295	10.0	4.5	3	32.3	Pallet	120
Atlas® 6 x 4 x 16	5 5/8	143	3 5/8	92	15 5/8	397	14.0	6.3	2.25	24.2	Pallet	100
Atlas® 8 x 4 x 12	7 5/8	194	3 5/8	92	11 5/8	295	15.3	6.9	3.00	32.3	Pallet	100
Atlas® 8 x 4 x 16	7 5/8	194	3 5/8	92	15 5/8	397	17.0	7.7	2.25	24.2	Pallet	80

ONLY AVAILABLE AS SPECIAL ORDER

Weights shown are approximate dry weights. Weight will vary with moisture content and with color. Coring configuration varies depending on brick size. Please refer to individual brick sizes on the website for accurate configurations.

ONLY AVAILABLE AS SPECIAL ORDER

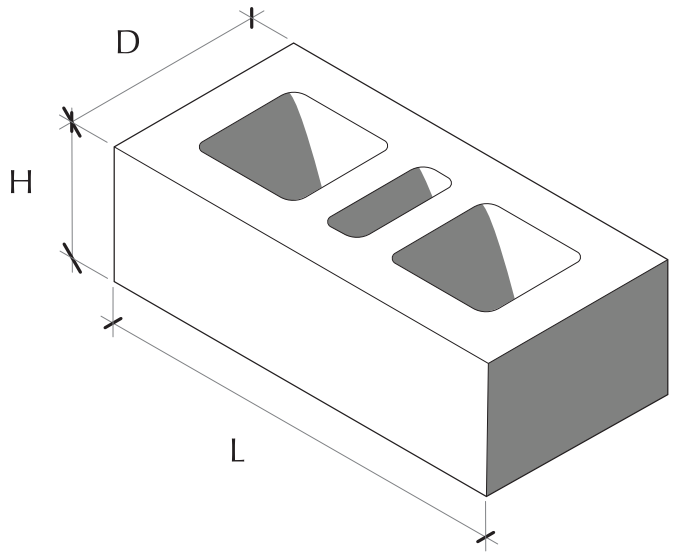

The Above Brick Manufactured by Interstate Brick comply with the following Specifications:

ASTM C652: Grade SW; Type HBA, HBS or HBX as specified in Purchase Order
CSA A82: Grade EG; Type HBA, HBS or HBX as specified in Purchase Order

Revision-1126